



TANO

C A B L E

河南泰诺电缆有限公司

HENAN TANO CABLE CO.,LTD.




BUILDING WIRE to DIN STANDARD



TANO

C A B L E

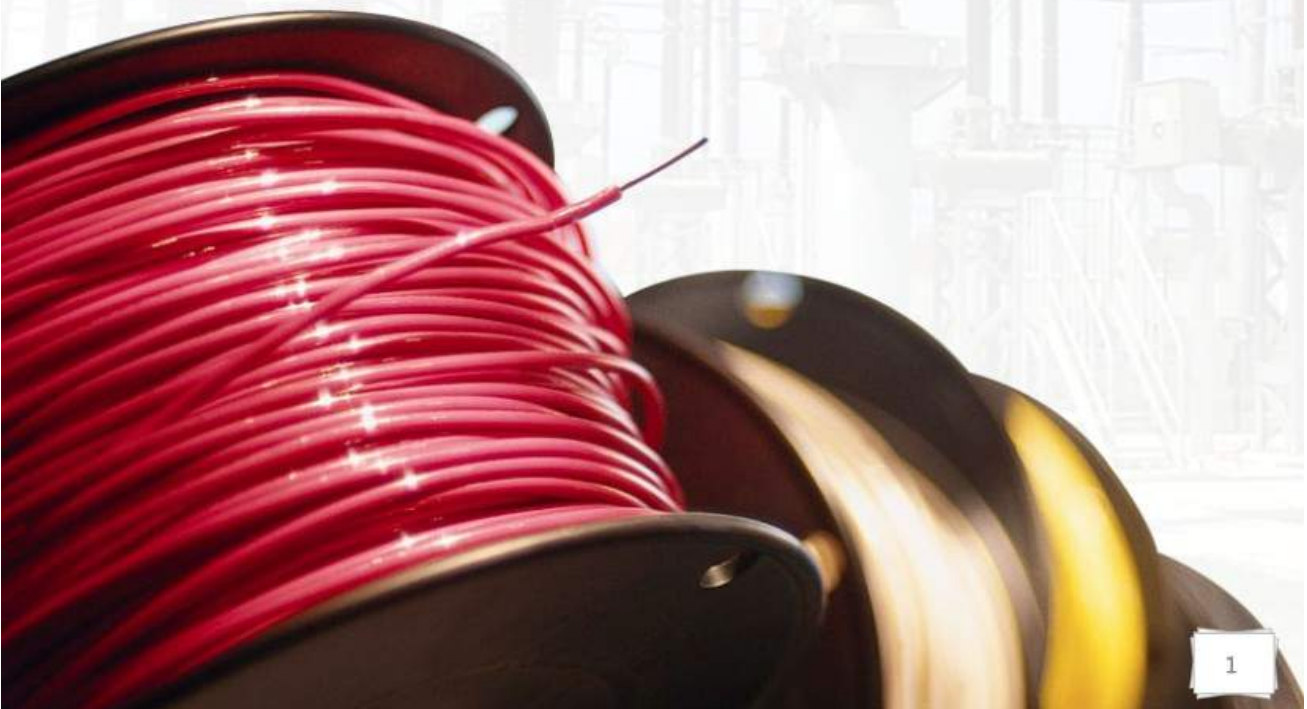

Henan Tano Cable Co., Ltd.(Tano Cable for short), is a leading and professional manufacturer of cable and wire with more than 20 years' history and manufacturing experience, located in Zhengzhou city which is the capital of Henan province, China.

Tano Cable aims at providing integral power solution for international customers. We are working together as one company to provide products and technologies for building, maintaining and advancing the power and information infrastructures that connect the world. We mainly have the following products with strong competitiveness: All Aluminum Conductors (AAC), All Aluminum Alloy Conductors (AAAC), Aluminum Conductors Steel Reinforcement (ACSR) , Aerial Bundled Cables (ABC), building wire, welding cable, control cable, instrument cable, rubber cable, PVC insulated power cable, XLPE insulated power cable up to 500KV, customer-tailored cable and cable accessories, conforming to many different Country or international standard, such as IEC, HAR, BS, DIN, ICEA, ASTM, SABS, AS/NZS, JIS and so on.

Tano Cable pays great importance on the quality. We have strong teams and equipments for both production and inspection. Moreover, we have been awarded many certificates of ISO, CE, SONCAP, others from China and abroad. We keep improving our quality management system to meet the client's final satisfaction.

C A B L E

Tano Cable has provided services to the global clients who working in all areas of the energy, construction, industrial, specialty and communications market, and obtained the client's trust and compliment.

Welcome your any inquiry! Welcome your any visit! Welcome your any contact! We will take our biggest sincerity to be your long-term friend and partner.





Building Wire H03VV-F/ H03VVH2-F to DIN Standard

APPLICATION


These cable types are especially suited for use on small appliances with low mechanical stress and for connection for light household appliances, e.g. kitchen utensils, desk lamps, floor lamps, vacuum cleaners, office machines, radios, etc. As far as these cables are admitted to the relevant specifications of the equipment, They are not permitted for use with cooking or heating apparatus. Cables with cross section 0.75 mm² are not suitable for outdoor use or use of industrial or farmer machineries. Max operating voltage in single or three phase system is U_o/U 330/330 volts. In a direct current system max operating voltage is U_o/U 495/495 volts.

STANDARD

<HAR>BS6500, CENELEC HD21.5, VDE 0281, CEI 20-20/5, CEI 20-35 (EN60332-1), CEI 20-52, CE low voltage directive 73/23/EEC & 93/68/EEC.ROHS compliant



CONSTRUCTION

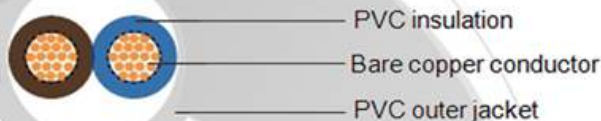

H03VV-F



H03VVH2-F

- Bare copper fine wire conductor
- Stranded to DIN VDE 0295 cl. 5, BS 6360 cl. 5, IEC 60228 cl. 5 and HD 383
- PVC core insulation T12 to VDE-0281 Part 1
- Color coded to VDE-0293-308
- Green-yellow grounding (3 conductors and above)
- PVC outer jacket TM2

TECHNICAL CHARACTERISTICS

Working voltage: 300/300 volts

Test voltage: 2000 volts

Flexing bending radius: 7.5 x Ø

Static bending radius: 4 x Ø

Flexing temperature: -5° C to +70° C

Static temperature: -40° C to +70° C

Short circuit temperature: +160° C

Flame retardant: IEC 60332.1

Insulation resistance: 20 MΩ x km



CONSTRUCTION PARAMETER

AWG	No. of Cores x Nominal Cross Sectional Area	Nominal Thickness of Insulation	Nominal Thickness of Sheath	Nominal Overall Diameter	Nominal Copper Weight	Nominal Weight
	No.xmm ²	mm	mm	mm	kg/km	kg/km
H03VV-F						
20(16/32)	2 x 0.50	0.5	0.6	5	9.6	38
20(16/32)	3 x 0.50	0.5	0.6	5.4	14.4	45
20(16/32)	4 x 0.50	0.5	0.6	5.8	19.2	55
18(24/32)	2 x 0.75	0.5	0.6	5.5	14.4	46
18(24/32)	3 x 0.75	0.5	0.6	6	21.6	59
18(24/32)	4 x 0.75	0.5	0.6	6.5	28.8	72
18(24/32)	5 x 0.75	0.5	0.6	7.1	36	87



河南泰诺电缆有限公司
HENAN TANO CABLE CO.,LTD.

Website: <http://www.tanocable.com/>

Tel.: 0086-371-60306197

Fax: 0086-371-60306197

Email: info@tanocable.com

Address: Zhengzhou City, Henan
Province, China.

Zip: 450000