



**TANO**

C A B L E

**河南泰诺电缆有限公司**

HENAN TANO CABLE CO.,LTD.




# RUBBER CABLE to HARMONIZED STANDARD



**TANO**

C A B L E

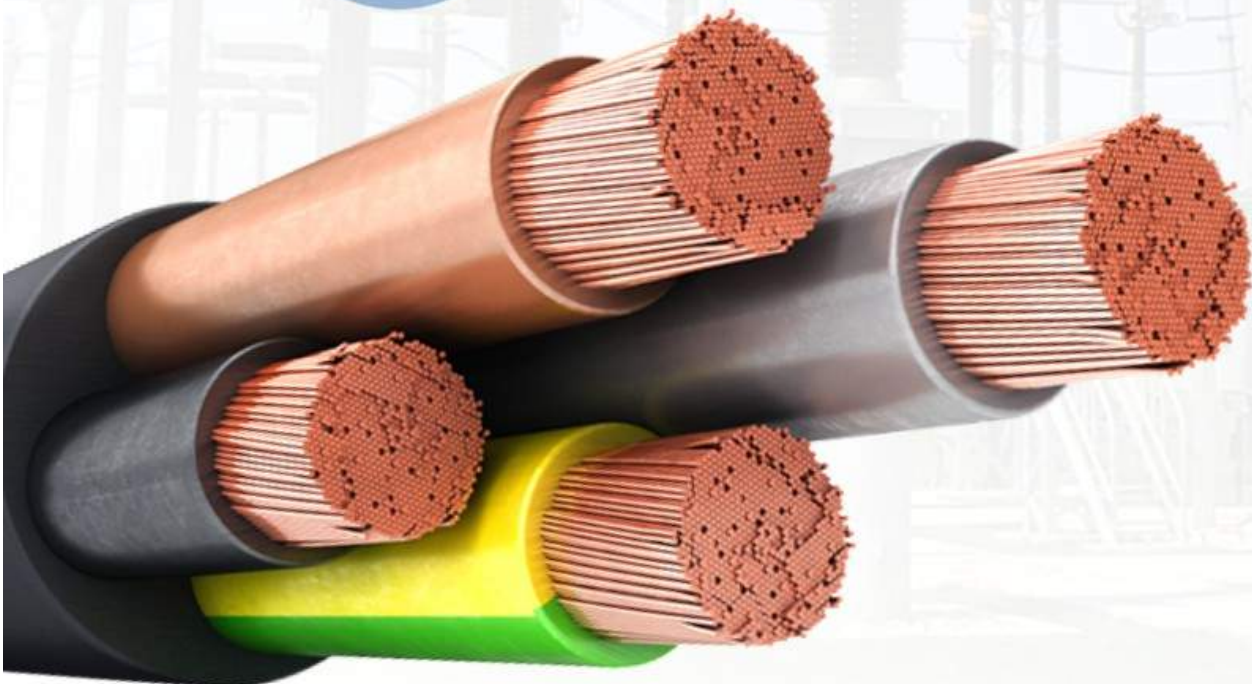

Henan Tano Cable Co., Ltd.( Tano Cable for short), is a leading and professional manufacturer of cable and wire with more than 20 years' history and manufacturing experience, located in Zhengzhou city which is the capital of Henan province, China.

Tano Cable aims at providing integral power solution for international customers. We are working together as one company to provide products and technologies for building, maintaining and advancing the power and information infrastructures that connect the world. We mainly have the following products with strong competitiveness: All Aluminum Conductors (AAC), All Aluminum Alloy Conductors (AAAC), Aluminum Conductors Steel Reinforcement (ACSR) , Aerial Bundled Cables (ABC), building wire, welding cable, control cable, instrument cable, rubber cable, PVC insulated power cable, XLPE insulated power cable up to 500KV, customer-tailored cable and cable accessories, conforming to many different Country or international standard, such as IEC, HAR, BS, DIN, ICEA, ASTM, SABS, AS/NZS, JIS and so on.

Tano Cable pays great importance on the quality. We have strong teams and equipments for both production and inspection. Moreover, we have been awarded many certificates of ISO, CE, SONCAP, others from China and abroad. We keep improving our quality management system to meet the client's final satisfaction.

Tano Cable has provided services to the global clients who working in all areas of the energy, construction, industrial, specialty and communications market, and obtained the client's trust and compliment.

Welcome your any inquiry! Welcome your any visit! Welcome your any contact! We will take our biggest sincerity to be your long-term friend and partner.







18(24/32)	2x0.75	0.6	0.8	6.3	53
17(32/32)	2x1	0.6	0.9	6.8	64
16(30/30)	2x1.5	0.8	1	8.3	95
14(30/50)	2x2.5	0.9	1.1	9.8	140
18(24/32)	3x0.75	0.6	0.9	6.8	65
17(32/32)	3x1	0.6	0.9	7.2	77
16(30/30)	3x1.5	0.8	1	8.8	115
14(30/50)	3x2.5	0.9	1.1	10.4	170
12(56/28)	3x4	1	1.2	12.2	240
10(84/28)	3x6	1	1.4	13.6	320
18(24/32)	4x0.75	0.6	0.9	7.4	80
17(32/32)	4x1	0.6	0.9	7.8	95
16(30/30)	4x1.5	0.8	1.1	9.8	145
14(30/50)	4x2.5	0.9	1.2	11.5	210
12(56/28)	4x4	1	1.3	13.5	300
10(84/28)	4x6	1	1.5	15.4	405
18(24/32)	5x0.75	0.6	1	8.3	100
17(32/32)	5x1	0.6	1	8.7	115
16(30/30)	5x1.5	0.8	1.1	10.7	170
14(30/50)	5x2.5	0.9	1.3	12.8	255

## Rubber Cable H03RT-H to Harmonized Standard

C A B L E


### APPLICATION

These cables are suitable for power connecting wire and complete lines between indoor household appliances, generally used for electric iron or electric saucepan. Not suitable for outdoor use nor power supply to electrical tools. Ozone, oxygen, UV rays and heat resistant.

### STANDARD

HD 22.14, DIN VDE 0282-14, ROHS compliant.

### CONSTRUCTION

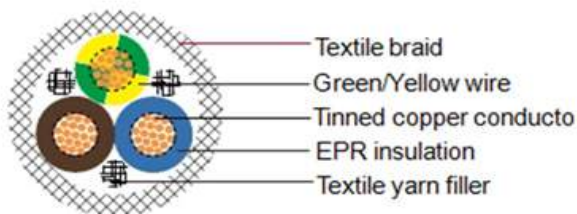

H03RT-H

- Flexible bare or tinned copper strand conductor acc. to DIN VDE 0295 class 5. IEC 60228 class 5
- EPR insulation type E14 of HD22.1
- Color coded to VDE 0293-308/HD 308(3 conductors and above with yellow/green wire)
- Textile yarn filler
- Textile braid of HD22.1

## TECHNICAL CHARACTERISTICS

Working voltage: 300/300 V

Test voltage: 2000V

Minimum bending radius: 10× cable diameter

Temperature range: - 25°C to + 60°C

Short circuit temperature: 200°C



## TECHNICAL PARAMETER

AWG	No. of Cores x Nominal Cross Sectional Area	Nominal Thickness of Insulation	Nominal Overall Diameter	Nominal Weight
	No. x mm <sup>2</sup>	mm	mm	kg/km
18(24/32)	2×0.75	0.8	6.30±0.20	36
17(32/32)	2×1.0	0.8	6.80±0.20	52
16(30/30)	2×1.5	0.8	7.20±0.20	42
18(24/32)	3×0.75	0.8	6.80±0.20	60
17(32/32)	3×1.0	0.8	7.20±0.20	54
16(30/30)	3×1.5	0.8	7.80±0.20	74





**河南泰诺电缆有限公司**  
HENAN TANO CABLE CO.,LTD.

Website: <http://www.tanocable.com/>

Tel.: 0086-371-60306197

Fax: 0086-371-60306197

Email: [info@tanocable.com](mailto:info@tanocable.com)

Address: Zhengzhou City, Henan  
Province, China.

Zip: 450000