



河南泰诺电缆有限公司

HENAN TANO CABLE CO.,LTD.




RUBBER CABLE to HARMONIZED STANDARD



TANO

C A B L E

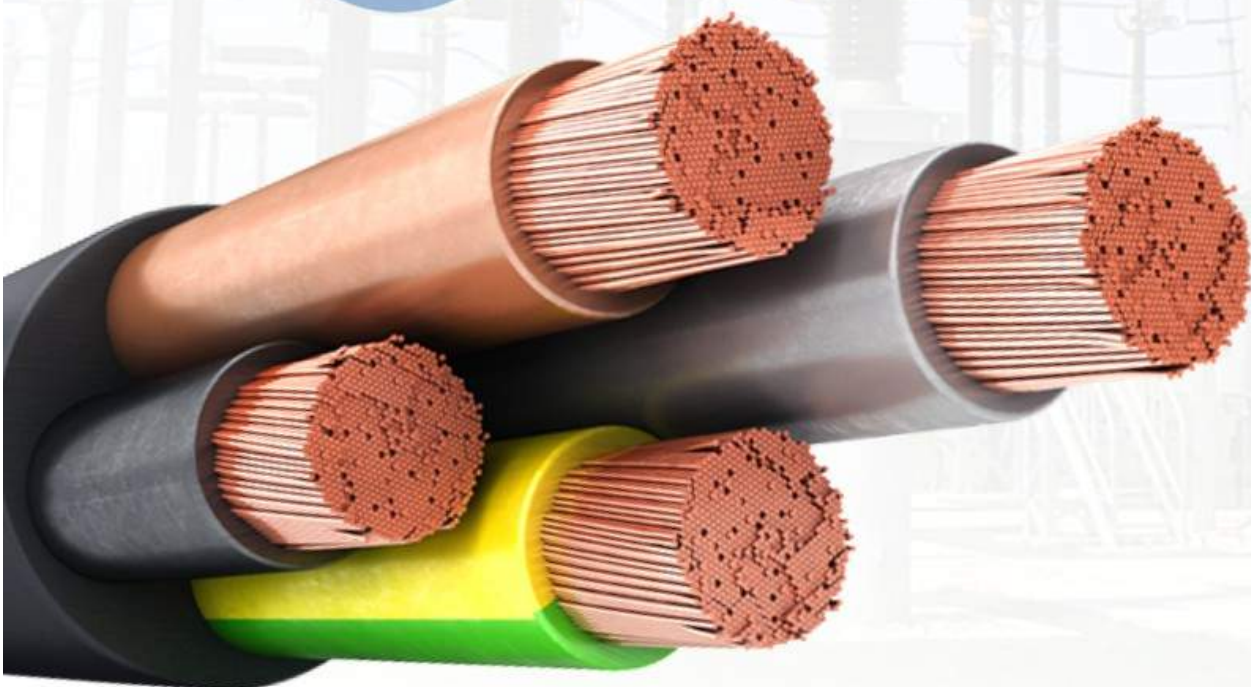

Henan Tano Cable Co., Ltd.(Tano Cable for short), is a leading and professional manufacturer of cable and wire with more than 20 years' history and manufacturing experience, located in Zhengzhou city which is the capital of Henan province, China.

Tano Cable aims at providing integral power solution for international customers. We are working together as one company to provide products and technologies for building, maintaining and advancing the power and information infrastructures that connect the world. We mainly have the following products with strong competitiveness: All Aluminum Conductors (AAC), All Aluminum Alloy Conductors (AAAC), Aluminum Conductors Steel Reinforcement (ACSR) , Aerial Bundled Cables (ABC), building wire, welding cable, control cable, instrument cable, rubber cable, PVC insulated power cable, XLPE insulated power cable up to 500KV, customer-tailored cable and cable accessories, conforming to many different Country or international standard, such as IEC, HAR, BS, DIN, ICEA, ASTM, SABS, AS/NZS, JIS and so on.

Tano Cable pays great importance on the quality. We have strong teams and equipments for both production and inspection. Moreover, we have been awarded many certificates of ISO, CE, SONCAP, others from China and abroad. We keep improving our quality management system to meet the client's final satisfaction.

Tano Cable has provided services to the global clients who working in all areas of the energy, construction, industrial, specialty and communications market, and obtained the client's trust and compliment.

Welcome your any inquiry! Welcome your any visit! Welcome your any contact! We will take our biggest sincerity to be your long-term friend and partner.





Rubber Cable H07RN8-F to Harmonized Standard

APPLICATION

These cables particularly for use in fresh water up to 10 m depth with a maximum water temperature up to 40°C , such as the connection of submersible pumps or similar applications. Not suitable for underwater power transmission or installation in a watercourse, or where it is possible that mechanical damage might occur and cause a hazard. Indirect underground installation is allowed provided that there is mechanically protection of the cables. These cables are manufactured according to the Standard and Approval CEI 20-19/16 (CENELEC HD 22.16). It is the only cable that the installation Standard and Approval CEI 64-8 at section 702 allows for installation in swimming pools and fountains. For connections liable to moderate mechanical stresses, i.e. industrial or agricultural workshop apparatus, large boilers, heater plates, electric tools such as drills and disk saws, electric appliances, portable motors and generators on building sites; also for fixed installations along floors or shelving on temporary job sites, for connecting structural elements in lifting apparatus, machinery, etc. Suitable for applications up to 1000 V for adequately protected fixed installations (i.e. inside pipes or equipment) as well as for rotor connections to lifting apparatus motors. They are Ozone, UV & weather resistant.

STANDARD

HD22.16 S1, VDE-0282 Part-16, CE low voltage directive 73/23/EEC & 93/68/EEC., ROHS compliant.

CONSTRUCTION



H07RN8-F

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber core insulation EI4 to VDE-0282 Part-1
- Color code VDE-0293-308 and HD 186
- Polychloroprene rubber (neoprene) jacket EM2

TECHNICAL CHARACTERISTICS

Working voltage: 450/750 volts

Test voltage: 2500 volts

Flexing bending radius: 6.0 x Ø

Fixed bending radius: 4.0 x Ø

Flexing Temperature: -25° C to +60° C

Fixed Temperature: -40° C to +60° C

Max Water Temperature: +40° C

Short circuit temperature: +250 ° C

Flame retardant: IEC 60332.1

Insulation resistance: 20 MΩ x km

TANO
C A B L E

TECHNICAL PARAMETER

AWG	No. of Cores x Nominal Cross Sectional Area	Nominal Thickness of Insulation	Nominal Thickness of Sheath	Nominal Overall Diameter	Nominal Copper Weight	Nominal Weight
	No. x mm²	mm	mm	mm (min-max)	kg/km	kg/km
17(32/32)	2x1	0.8	1.3	7.7-10	19	89
17(32/32)	3x1	0.8	1.4	8.3-10.7	29	111
17(32/32)	4x1	0.8	1.5	9.2-11.9	38	146
16(30/30)	1x1.5	0.8	1.4	5.7-7.1	14.4	59
16(30/30)	2 x 1.5	0.8	1.5	8.5-11.0	29	135
16(30/30)	3 x 1.5	0.8	1.6	9.2-11.9	43	165
16(30/30)	4 x 1.5	0.8	1.7	10.2-13.1	58	200
16(30/30)	5 x 1.5	0.8	1.8	11.2-14.4	72	240

16(30/30)	7 x 1.5	0.8	2.6	14.5-17.5	101	385
16(30/30)	12 x 1.5	0.8	2.9	17.6-22.4	173	516
16(30/30)	19 x 1.5	0.8	3.2	20.7-26.3	274	800
16(30/30)	24 x 1.5	0.8	3.5	24.3-30.7	346	882
14(50/30)	1 x 2.5	0.9	1.4	6.3-7.9	24	72
14(50/30)	2 x 2.5	0.9	1.7	10.2-13.1	48	195
14(50/30)	3 x 2.5	0.9	1.8	10.9-14.0	72	235
14(50/30)	4 x 2.5	0.9	1.9	12.1-15.5	96	290
14(50/30)	5 x 2.5	0.9	2	13.3-17.0	120	345
14(50/30)	7 x 2.5	0.9	2.8	16.5-20.0	168	520
14(50/30)	12 x 2.5	0.9	3.1	20.6-26.2	288	810
14(50/30)	19 x 2.5	0.9	3.5	25.5-31.0	456	1200
14(50/30)	24 x 2.5	0.9	3.9	28.8-36.4	576	1650
12(56/28)	1x4	1	1.5	7.2-9.0	38	99
12(56/28)	2x4	1	1.8	11.8-15.1	77	270
12(56/28)	3x4	1	1.9	12.7-16.2	115	320
12(56/28)	4x4	1	2	14.0-17.9	154	395
12(56/28)	5x4	1	2.2	15.6-19.9	192	485
12(56/28)	7x4	1	3.1	18.2-21.8	269	681
10(84/28)	1x6	1	1.6	7.9-9.8	58	130
10(84/28)	3x6	1	2.1	14.1-18.0	173	495
10(84/28)	4x6	1	2.3	15.7-20.0	230	610
10(84/28)	5x6	1.2	3.6	17.6-22.2	288	760
8(80/26)	1 x 10	1.2	1.8	9.5-11.9	96	230
8(80/26)	3 x 10	1.2	3.3	19.1-24.2	288	880
8(80/26)	4 x 10	1.2	3.4	20.9-26.5	384	1060
8(80/26)	5 x 10	1.2	3.6	22.9-29.1	480	1300
6(128/26)	1 x 16	1.2	1.9	10.8-13.4	154	320
6(128/26)	3 x 16	1.2	3.5	21.8-27.6	461	1090
6(128/26)	4 x 16	1.2	3.6	23.8-30.1	614	1345
6(128/26)	5 x 16	1.2	3.9	26.4-33.3	768	1680
4(200/26)	1 x 25	1.4	2	12.7-15.8	240	450
4(200/26)	4 x 25	1.4	4.1	28.9-36.6	960	1995
4(200/26)	5 x 25	1.4	4.4	32.0-40.4	1200	2470
2(280/26)	1 x 35	1.4	2.2	14.3-17.9	336	605
2(280/26)	3 x 35	1.4	4.1	29.3-37.1	1008	1900
2(280/26)	4 x 35	1.4	4.4	32.5-41.1	1344	2645
2(280/26)	5 x 35	1.4	4.7	37.0-45.0	1680	2810
1(400/26)	1 x 50	1.6	2.4	16.5-20.6	480	825
1(400/26)	4 x 50	1.6	4.8	37.7-47.5	1920	3635
1(400/26)	5 x 50	1.6	5.1	40.0-50.8	2400	4050
2/0(356/24)	1 x 70	1.6	2.6	18.6-23.3	672	1090
2/0(356/24)	4 x 70	1.6	5.2	42.7-54.0	2688	4830
3/0(485/24)	1 x 95	1.8	2.8	20.8-26.0	912	1405



河南泰诺电缆有限公司

HENAN TANO CABLE CO.,LTD.

Website: <http://www.tanocable.com/>

Tel.: 0086-371-60306197

Fax: 0086-371-60306197

Email: info@tanocable.com

Address: Zhengzhou City, Henan
Province, China.

Zip: 450000